

# Biogas



Over 15 years of odor control expertise



## Don't let foul odor interfere with converting waste to energy


Our systems are designed for the removal of hydrogen sulfide and other odorous contaminants from the biogas process. Our PureAir units combined with our premium media guarantees a high-quality performance fit for H<sub>2</sub>S removal. We offer custom options depending on customer needs; PureAir can provide anything from replacement media to full systems and even subscriptions for media and changeout services.

### PureAir Advantages

- Countless customizable options for site-specific operating needs
- Only company in industry to offer our patented highest removal capacity Sulphasorb FeXL™
- Long lasting media life
- Easy system maintenance
- Consistent and reliable performance
- Hassle-free media changeout



Our Sulphasorb Fe™ and Sulphasorb FeXL™ adsorbent media provide almost double the filtration capacity as iron sponge technology, resulting in better value for your money. Once the Hydrogen Sulfide is removed by Sulphasorb Fe or Sulphasorb FeXL™, PureAir's other media can be used in a polishing unit to pick up all other unwanted gases and odors. This ensures over 99% removal of all unwanted gases.

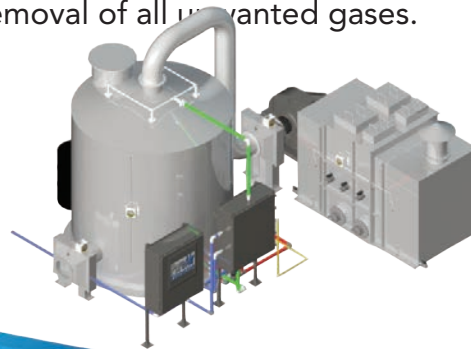

+1 678.935.1431

Toll Free: 866.543.7479

[www.PureAirFiltration.com](http://www.PureAirFiltration.com)

6050 Peachtree Pkwy Suite 240-187. Atlanta, GA, USA 30092